


REFER TO NOTE #5 BELOW FOR PAVE BACK REQUIREMENTS ASSOCIATED WITH NEW OR REPLACEMENT CURB, GUTTER AND SIDEWALKS.



PIPE BEDDING DETAIL

1. AGGREGATE BASE SHALL BE COMPACTED WITH OPTIMUM MOISTURE TO 95% RELATIVE DENSITY. CITY MAY REQUIRE DENSITY TESTING OF SUBGRADE AND/OR TRENCHES AT OWNER'S EXPENSE.
2. DEPTH OF ASPHALT CONCRETE:
RESIDENTIAL STREET: 2 LANE: 3", 4 LANE: 4"
COMMERCIAL STREET: 2 LANE: 3", 4 LANE: 4"
INDUSTRIAL STREET: 2 LANE: 3", 4 LANE: 4"
3. DEPTH OF AGGREGATE BASE:
RESIDENTIAL STREET: 2 LANE: 10", 4 LANE: 10"
COMMERCIAL STREET: 2 LANE: 10", 4 LANE: 10"
INDUSTRIAL STREET: 10"
4. DEPTHS OF ASPHALT CONCRETE AND AGGREGATE BASE SPECIFIED IN NOTES 2 AND 3 ARE MINIMUM ALLOWABLE. SPECIFIC STREET LOCATIONS WAY REQUIRE ADDITIONAL DEPTH PURSUANT TO THE REQUIREMENTS OF THE ENGINEER.
5. REPLACEMENT OF STREET ASPHALT NECESSARY DUE TO THE CONSTRUCTION OF EITHER NEW (INFILL) OR REPLACEMENT CURB, GUTTER OR SIDEWALK SHALL REQUIRE A MINIMUM OF A 12" WIDE PAVE BACK. WIDER PAVE BACKS MAY BE REQUIRED IN SITUATIONS WHERE EXISTING ROAD CONDITIONS WILL PREVENT PROPER DRAINAGE.

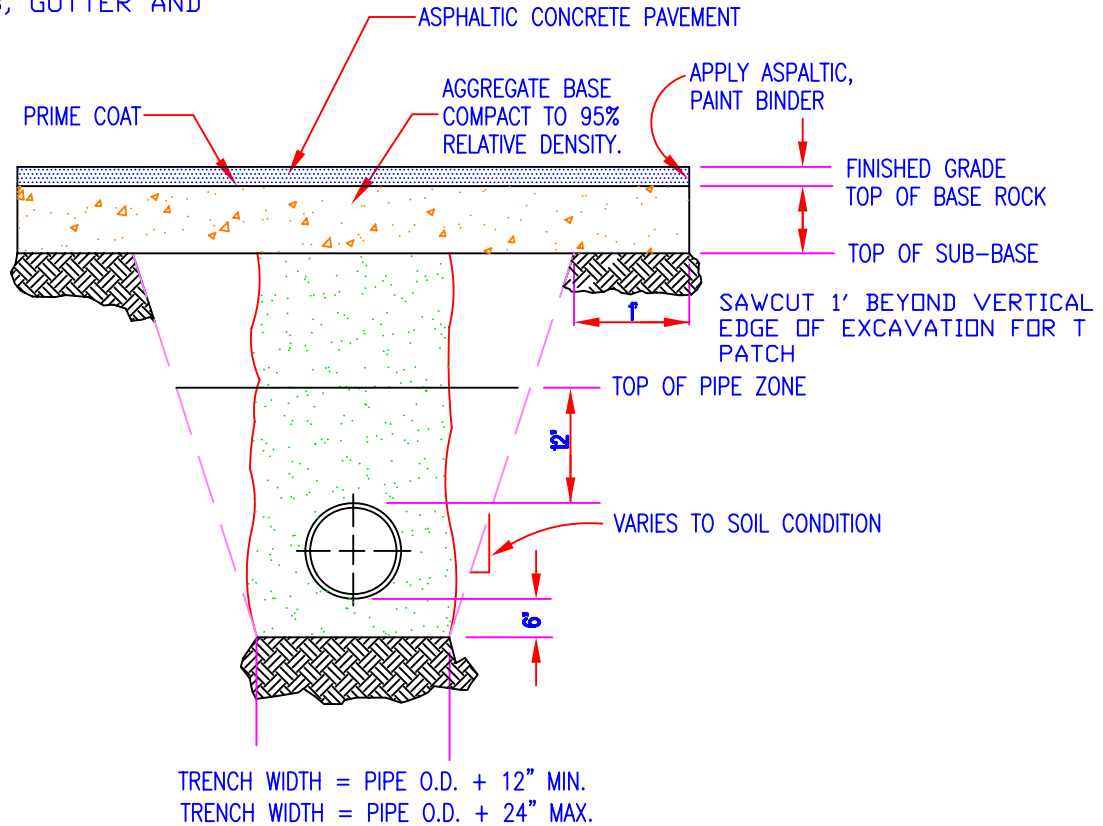

CITY OF OROVILLE DEPARTMENT OF PUBLIC WORKS		REVISIONS 1-10-90 9-05-00 8-15-06
STANDARD FOR STREET REPAIR/PAVEMENT REPLACEMENT		DATE 6-16-93
DRAWN BY. TF.	ERIC M. TEITELMAN, P.E. <small>DIRECTOR OF PUBLIC WORKS DEPARTMENT</small>	SHEET 1 OF 1 ST-29